


Two Stage Gasoline | AGW Series



GFCI 5-20R
NEMA L14-20R
120V/240V

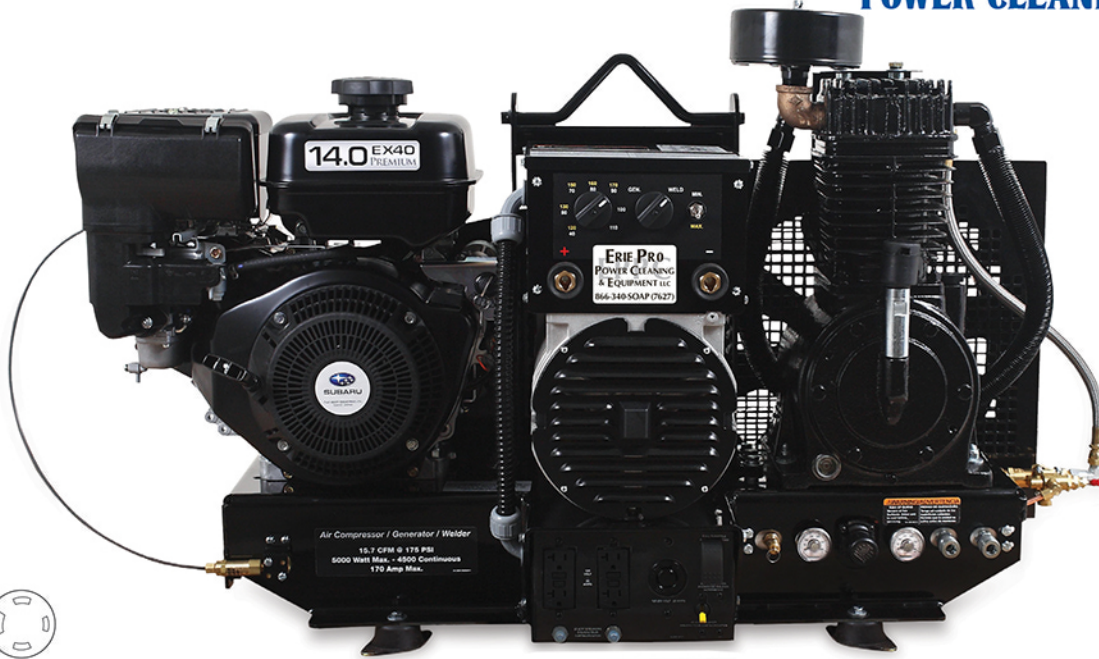

AGW-SR14-B



20 & 30-Gallon Models

Model No.	AGW-SH22-20M	AGW-SR14-30M	AGW-SR14-B
Engine			
<i>Displacement/Engine</i>	688cc Honda OHV with electric start - battery cables included; battery not included	404cc Subaru OHC with electric start - battery and battery cables not included	404cc Subaru OHC with electric start - battery and battery cables not included
<i>Rated Speed</i>	3600 RPM	3600 RPM	3600 RPM
Compressor			
<i>CFM @ 90 PSI</i>	30.5	16.4	16.4
<i>CFM @ 175 PSI*</i>	29.0	15.7	15.7
<i>Compressor</i>	Two stage, cast iron	Two stage, cast iron	Two stage, cast iron
<i>Tank Size</i>	20-gallon receiver tank	30-gallon receiver tank	Not applicable – base-mount model
Generator			
<i>Max. AC Output</i>	5000 watts	5000 watts	5000 watts
<i>Rated AC Output</i>	4500 watts	4500 watts	4500 watts
<i>Alternator Wattage</i>			
<i>Cont. On-Load @ 90 PSI</i>	4500 watts	3000 watts	3000 watts
<i>Cont. On-Load @ 175 PSI</i>	4500 watts	2500 watts	2500 watts
<i>Frequency/Voltage</i>	60Hz/120V/240V	60Hz/120V/240V	60Hz/120V/240V
<i>Max. Amps (120V/240V)</i>	41.5/20.8	41.7/20.8 off-load	41.7/20.8 off-load
<i>Cont. Amps (120V/240V)</i>	37.5/18.8	35.7/18.7 off-load	35.7/18.7 off-load
<i>Receptacles</i>	(2) 120V, 20A GFCI duplex (1) 120V/240V, 20A twist lock	(2) 120V, 20A GFCI duplex (1) 120V/240V, 20A twist lock	(2) 120V, 20A GFCI duplex (1) 120V/240V, 20A twist lock
Welder			
<i>Duty Cycle (10 Min. Run Time)</i>	220A @ 40%, 190A @ 60%, 150A @ 100%	150A @ 100%	150A @ 100%
<i>DC Voltage</i>	50-220A working range	50-170A working range	50-170A working range
Miscellaneous			
<i>Fuel Tank</i>	10-gallon	1.85-gallon	1.85-gallon
<i>Dimensions (LxWxH)</i>	47x24x50in.	46x22x47in.	49x22x28.5in.
<i>Ship Wt.</i>	870 lb.	650 lb.	449 lb.
<i>Net Wt.</i>	803 lb.	585 lb.	384 lb.

*Equipped with 150-PSI maximum rated regulator.

Accessories & Options:

Part Number	Description	Fits Models	Part Number	Description	Fits Models
70-0358	Engine oil drain extension	Subaru models	AX-0070	Battery tray, box and 2-ft. of cables included	Subaru models
AW-6000-1002	Equipment cover	Subaru models	IX-0001	Vibration pads - recommended for models that are mounted in service truck applications	AGW-SH22-20M & AGW-SR14-30M
AW-6000-1003	Equipment cover	AGW-SH22-20M			